

DISPLAY 2000/G4

24m
IP41



Green buildings

Gold certified exit sign luminaire for "sustainable building" according to LEED



DISPLAY 2000/G4

Show a clear edge. The Display 2000/G4 is a real all-rounder. Whether design or option variety, this exit sign luminaire that has been awarded gold for sustainable building is convincing.



DISPLAY 2000/G4

SYSTEM LUMINAIRE

Viewing distance	24 m
Degree of protection	IP41
Class	I
Enclosure material	Sheet steel
Enclosure colour/surface	RAL 9016 (white)
Terminal block	3 x 2.5 ² for through wiring
Light source	LED
Ambient temperature	-20° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W Suspended surface mounted and suspended recessed installation with different connected load (AC/DC): 10.1 VA/6.0 W
Supply voltage	230V ± 10 %, 50/60 Hz / 176-275 V DC

VERSIONS

1 h with auto-check with BUS check	
3 h with auto-check with BUS check	
8 h with auto-check with BUS check	
without monitoring module	•
with monitoring module	•
with DALI monitoring	•
Cinema version	•
Luminous flux in normal mode 10 %	


SPECIAL FEATURE

- Power supply via wire suspension


OPTIONS /ACCESSORIES

- Wire lengths up to 6 m | - Enclosure made of brushed stainless steel | - Ball guard | - Other RAL colours on request


WALL MOUNTED

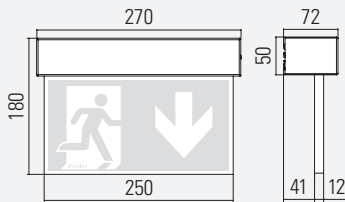


CEILING MOUNTED

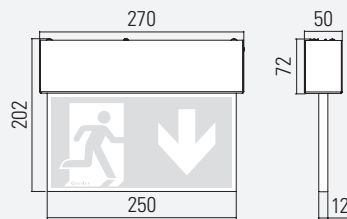


PENDANT

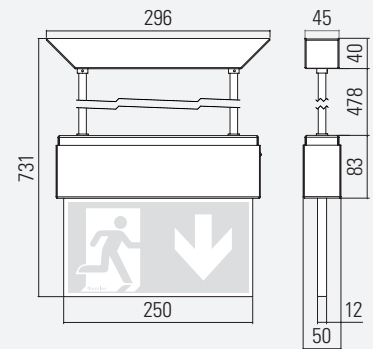


SUSPENDED, RECESSED BASE

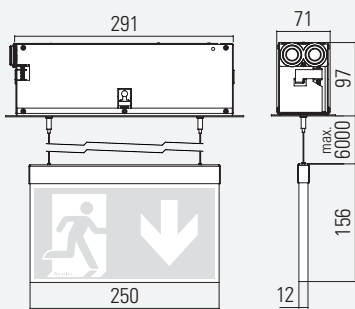

SUSPENDED

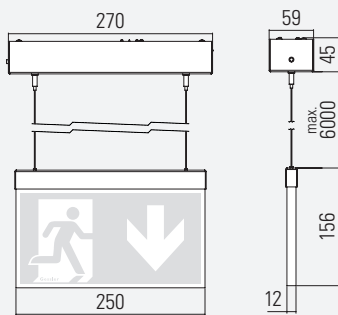

EYE INSTALLATION

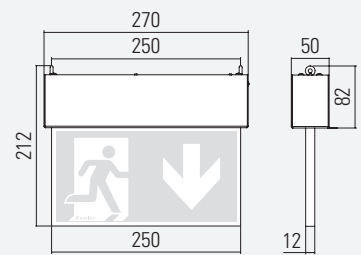

Ceiling cutout: 295 mm x 75 mm
Maximum ceiling thickness: 43 mm

WALL BRACKET MOUNTING

