

LUMINA 2000/16 RZH

26 m | 27 m
IP54 | IK08



LUMINA 2000/16 RZH

The integrated heater ensures an optimised operating temperature – even if the ambient temperature drops to arctic levels. Components that are easily affected by low temperatures such as the battery are therefore properly protected. The LUMINA 2000/16 RZH is the ideal model for open parking facilities, refrigerated warehouses and outdoor areas.



BATTERY-POWERED LUMINAIRE

Visible distance	Wall: 26 m Ceiling: 27 m
Protection class	IP54
Impact strength	IK08
Protection rating	I
Housing material	Polycarbonate
Housing colour/finish	white
Terminal	4 x 2,5 [□]
Illuminant	LED
Ambient temperature	-20 °C to +40 °C
Power (AC)	40 W (max. heating output)
Voltage	230 V AC
BATTERY	NiCd – 3,6 V/2,5 Ah

MODEL


1 h with auto BUS check	• •
3 h with auto BUS check	• •
8 h with auto BUS check	• •
without monitoring	-
with monitoring	-
DALI monitoring	-
Cinema version	-

ACCESSORIES | OPTIONS


Impact protection grille




WALL MOUNTING

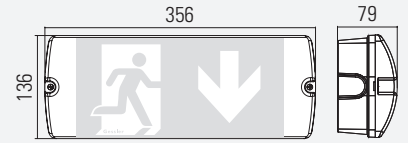

CEILING MOUNTING

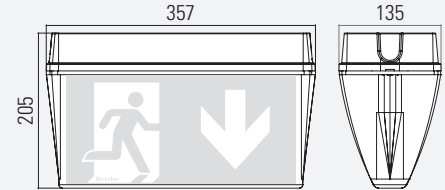

EYELET MOUNTING

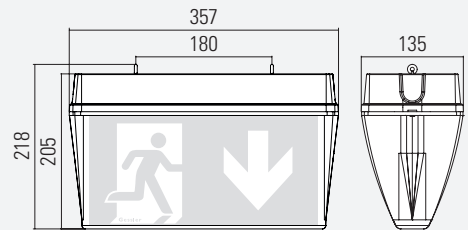

WALL BRACKET MOUNTING

