

DISPLAY 2200

22m
IP41



DISPLAY 2200

Discreetly in the background, but ready when it's needed. The surface-mounted enclosure can be pivoted continuously and is therefore not only suitable for mounting on the wall, but also on the ceiling. The free bright display panel is enclosed in a matt anodised enclosure made of aluminium.



DISPLAY 2200 SYSTEM LUMINAIRE RECHARGEABLE BATTERY LUMINAIRE

Viewing distance	22 m	
Degree of protection	IP41	
Class	I	
Enclosure material	Aluminium	
Enclosure colour/surface	Silver anodised	
Terminal block	3 x 2.5 [□] for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	6.6 VA/3.7 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	4.8 V/0.8 Ah (NiMH)	

VERSIONS

1 h with auto-check with BUS check	•
3 h with auto-check with BUS check	•
8 h with auto-check with BUS check	
without monitoring module	•
with monitoring module	
with DALI monitoring	
Cinema version	
Luminous flux in normal mode 10 %	

SPECIAL FEATURE


- Power supply via wire suspension
- Universal surface-mounting due to pivoted luminaire body

OPTIONS /ACCESSORIES


- Wire lengths up to 6 m
- Other RAL colours on request



WALL MOUNTED

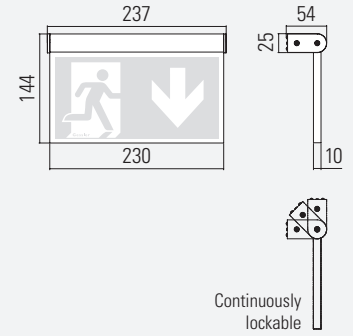

CEILING MOUNTED

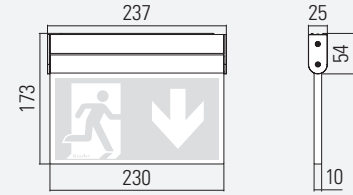

SUSPENDED

