

DISPLAY DG3 | DG6

24m
IP20 | IP41



green buildings
Gold certified exit sign
luminaire for "sustainable
building" according to
LEED

DISPLAY DG3 | DG6

The Display DG3 | DG6 has a convincing linear design. Only available as a rechargeable battery version, the exit sign luminaire has 7 types of installation to choose from and so it is therefore the ideal exit sign luminaire for any place of use. Whether 1h, 3h or 8h stored energy time, our Display DG3 | DG6 is THE self-contained luminaire for every requirement. At least where design plays a role.



DISPLAY DG3 | DG6
RECHARGEABLE BATTERY LUMINAIRE

Viewing distance	24 m
Degree of protection	IP20 (DG6E) IP41 (DG3)
Class	I
Enclosure material	Sheet steel
Enclosure colour/surface	RAL 9016 (white)
Terminal block	3 x 2.5 ² for through wiring
Light source	LED
Ambient temperature	0° C to +40° C
Connected load (AC)	7.6 VA
Supply voltage (AC)	230V ± 10 %, 50/60 Hz
Rechargeable battery	3.6 V/2.5 Ah (NiCd)

VERSIONS

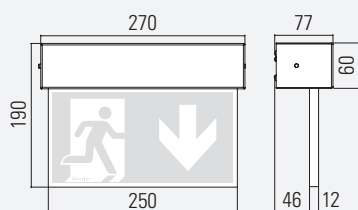

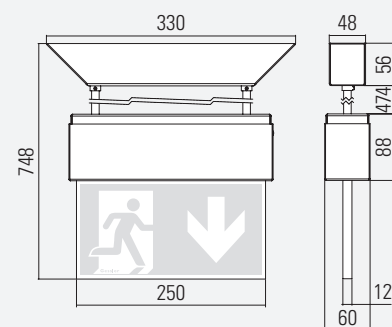

1 h with auto-check with BUS check	• •
3 h with auto-check with BUS check	• •
8 h with auto-check with BUS check	• •
without monitoring module	• •
with monitoring module	
with DALI monitoring	
Cinema version	
Luminous flux in normal mode 10 %	

SPECIAL FEATURE


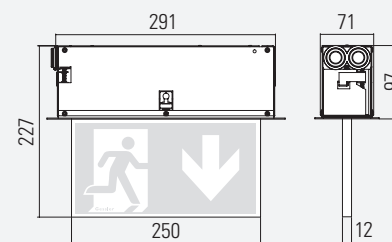
- Power supply via wire suspension

OPTIONS /ACCESSORIES

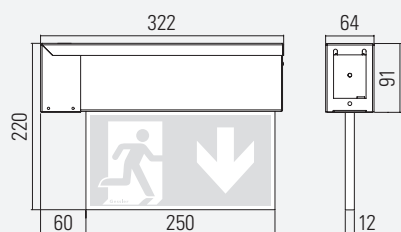
- Wire lengths up to 6 m | - Enclosure made of brushed stainless steel | - Ball guard | - Other RAL colours on request

DG3W WALL MOUNTED

DG3D CEILING MOUNTED

DG3P PENDANT

DG3F SUSPENDED, RECESSED BASE


Ceiling cutout: 295 mm x 75 mm
Maximum ceiling thickness: 43 mm

DG3S SUSPENDED

DG6E RECESSED CEILING INSTALLATION


Ceiling cutout: 295 mm x 75 mm
Maximum ceiling thickness: 43 mm

DG3A WALL BRACKET MOUNTING

DG3Ö EYE INSTALLATION
