

DISPLAY DG7 | DG5

31 m
IP20 | IP41



DISPLAY DG7 | DG5

With a viewing distance of 31 m, the Display DG7 | DG5 is unmissable. Whether as a system or rechargeable battery version, this exit sign luminaire is game-changing. Particularly suitable for shopping centres, schools and airports.



Viewing distance	31 m	
Degree of protection	IP20 (DG5E) IP41(DG7)	
Class	I	
Enclosure material	Sheet steel	
Enclosure colour/surface	RAL 9016 (white)	
Terminal block	3 x 2.5 ² for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	3.6 V/2.5 Ah (NiCd)	


VERSIONS

1 h with auto-check with BUS check		• •
3 h with auto-check with BUS check		• •
8 h with auto-check with BUS check		• •
without monitoring module	•	
with monitoring module	•	
with DALI monitoring	•	
Cinema version	•	
Luminous flux in normal mode 10 %		


OPTIONS /ACCESSORIES

- Enclosure made of brushed stainless steel
- Ball guard
- Other RAL colours on request


DG7W WALL MOUNTED

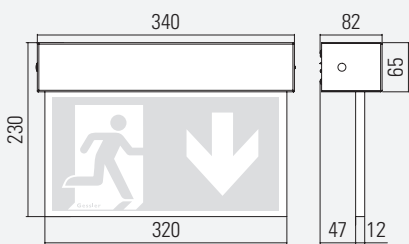


DG7D CEILING MOUNTED

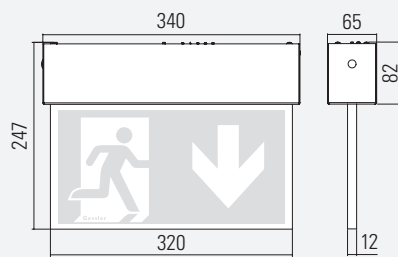


DG7P PENDANT

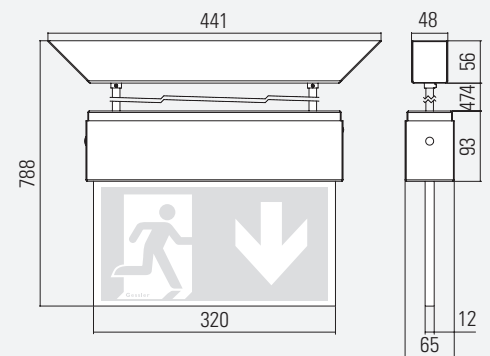


DG7Ö EYE INSTALLATION

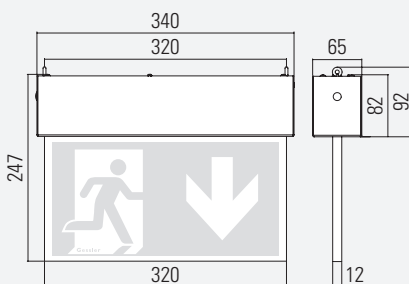

DG7A WALL BRACKET MOUNTING

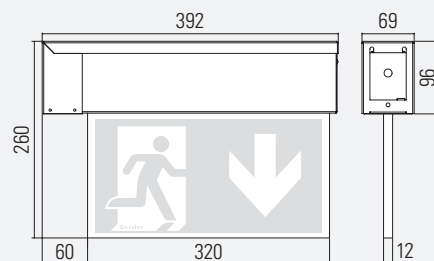

DG5E RECESSED CEILING INSTALLATION

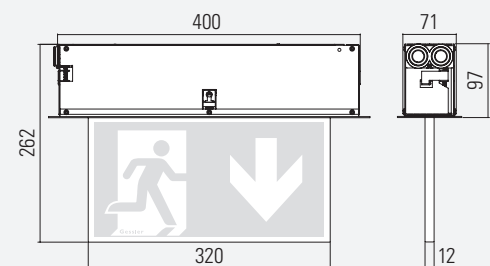

Ceiling cutout: 405 mm x 75 mm
Maximum ceiling thickness: 43 mm