


# DISPLAY DR1

14 m  
IP20 | IP41

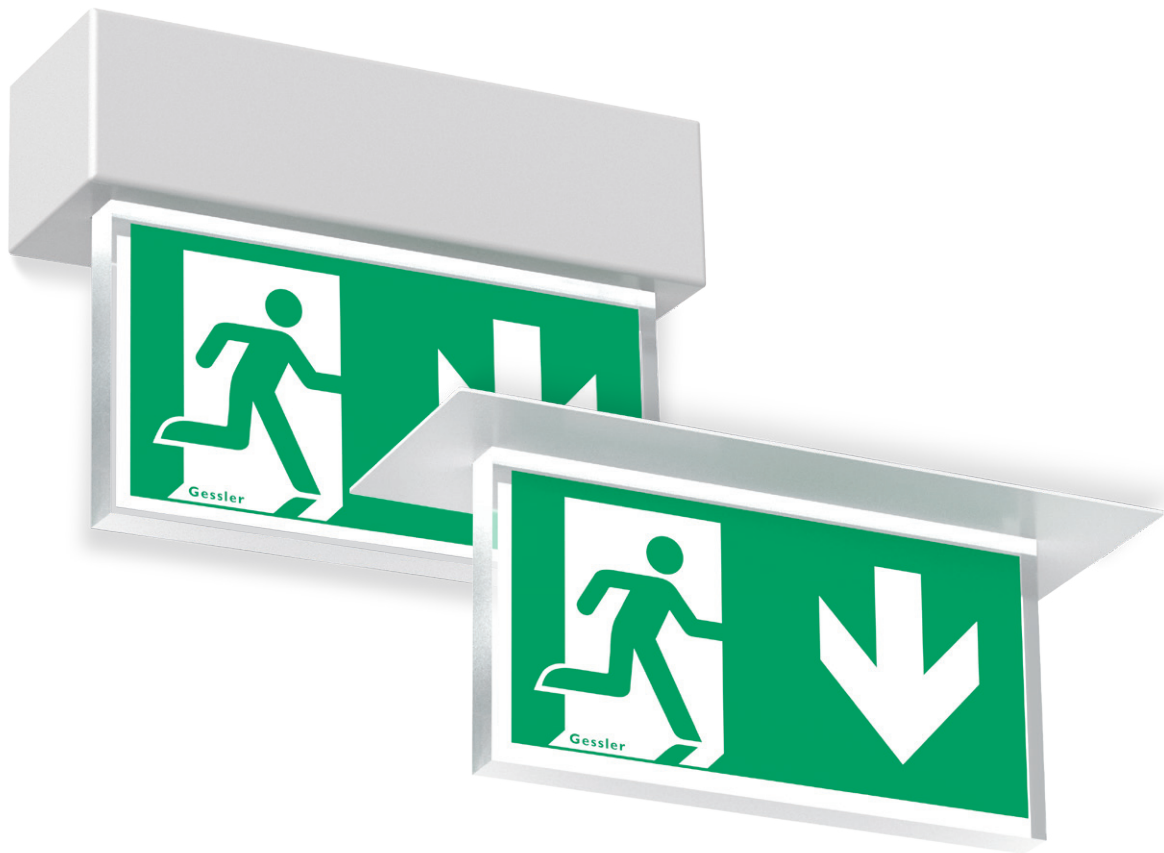

## DISPLAY DR1

Small and yet very big. Although the DR1 is probably the smallest display escape sign luminaire on the market, it has a recognition range of 14 m. Due to its extremely compact design, the DR1 can be seamlessly integrated wherever architecture is in the foreground and technology is in the background. Developed according to the design and size specifications of one of the leading architectural offices in Germany for the most spectacular high-rise ensemble in Europe- the "FOUR Frankfurt".



**DISPLAY DR1**

**SYSTEM LUMINAIRE**

Viewing distance	14 m
Degree of protection	IP20 (DR1E)   IP41
Class	I
Enclosure material	Sheet steel
Enclosure colour/surface	RAL 9016 (white)
Terminal block	3 x 2.5 <sup>2</sup> for through wiring
Light source	LED
Ambient temperature	-20° C to +40° C
Connected load (AC/DC)	2,2 VA/2,0W
Supply voltage	230V ± 10 %, 50/60 Hz / 176-275 V DC

**VERSIONS**

1 h with auto-check   with BUS check	
3 h with auto-check   with BUS check	
8 h with auto-check   with BUS check	
without monitoring module	•
with monitoring module MERLIN and SIBELON systems only	•
with DALI monitoring	
Cinema version Luminous flux in normal mode 10 %	


**SPECIAL FEATURE**

- Very compact design


**OPTIONS /ACCESSORIES**

- Brushed stainless steel cover and housing
- Other RAL colours on request
- Concrete adapter
- Concrete pouring pot


**DR1W WALL MOUNTING**

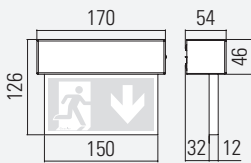


**DR1D CEILING MOUNTING**




**DR1P PENDANT MOUNTING**

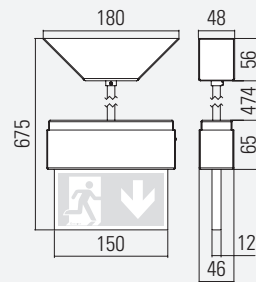



**DR1A WALL BRACKET MOUNTING**

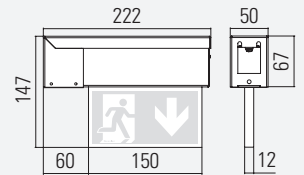

**DR1Ö EYELET MOUNTING**



**DR1E RECESSED CEILING MOUNTING JUNCTION BOX FOR DR1E**

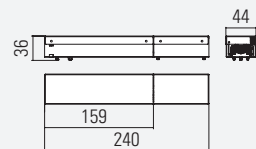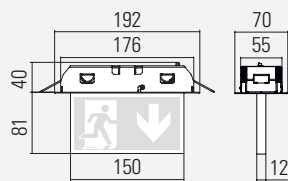

Ceiling cutout: 180 mm x 60 mm  
Maximum ceiling thickness: 45 mm  
Minimum clear ceiling height: 40 mm

Minimum clear ceiling height: 120 mm