

LUMINA 2000/5 | 7 18 m | 27 m IP40



LUMINA 2000/5 | 2000/7

The design classic. The tried and tested Profile luminaire series is available with four viewing distances. We are also still producing this series with the tried and tested window for downward light emission.



LUMINA 2000/5 2000/7	SYSTEM LUMINAIRE (2000/5)	SYSTEM LUMINAIRE (2000/7)	RECHARGEABLE BATTERY LUMINAIRE (2000/7)
Viewing distance	18 m		27 m
Degree of protection	IP40		IP40
Class	I		I
Enclosure material	Aluminium		Aluminium
Enclosure colour/surface	RAL 9016 (white)		RAL 9016 (white)
Terminal block	3 x 2.5 ² for through wiring		3 x 2.5 ² for through wiring
Light source	LED		LED
Ambient temperature	-20° C to +40° C	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W	10.0 VA/5.5 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery			3.6 V/2.5 Ah (NiCd)

VERSIONS

1 h with auto-check with BUS check			• •
3 h with auto-check with BUS check			• •
8 h with auto-check with BUS check			• •
without monitoring module	•	•	
with monitoring module	•	•	
with DALI monitoring	•	•	
Cinema version	•	•	
Luminous flux in normal mode 10 %			


SPECIAL FEATURE

- Pictogram set included | - Enclosure with additional window for downward light emission


OPTIONS /ACCESSORIES

- Ball guard | - Other RAL colours on request


L05W WALL MOUNTED




L05D CEILING MOUNTED

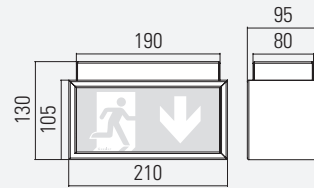


L05P PENDANT

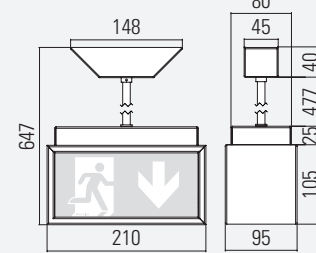

L05Ö EYE INSTALLATION

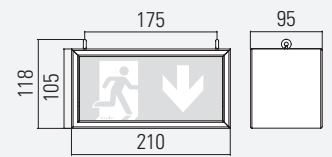


L05A WALL BRACKET MOUNTING

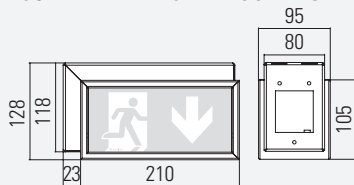


L05


L07W WALL MOUNTED

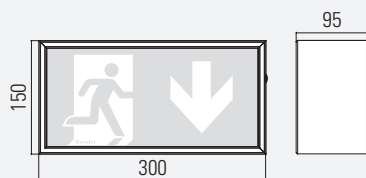


L07D CEILING MOUNTED

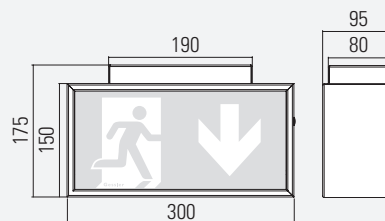


L07P PENDANT

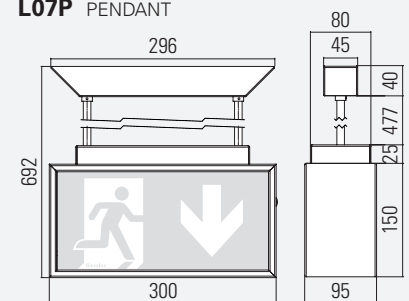

L07Ö EYE INSTALLATION

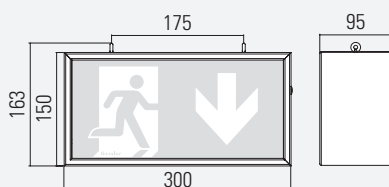

L07A WALL BRACKET MOUNTING

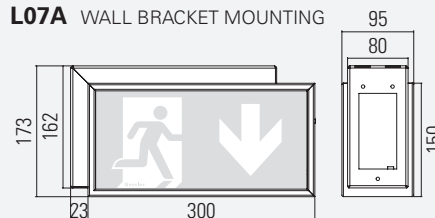

L07