

# LUMINA 2000/1

IP44  
LED



Wherever low ceilings pose a problem for the installation of emergency lighting, the Lumina 2000/1 is the preferred solution.

LUMINA 2000/1 SYSTEM LUMINAIRE RECHARGEABLE BATTERY LUMINAIRE


Degree of protection	IP44	
Class	I	
Enclosure material	Polycarbonate	
Enclosure colour/surface	white	
Terminal block	3 x 2.5 <sup>□</sup> for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	3.6 V/2.5 Ah (Ni-Cd)	

VERSIONS

1 h with auto-check   with BUS check	•   •
3 h with auto-check   with BUS check	•   •
8 h with auto-check   with BUS check	
without monitoring module	•
with monitoring module	•
with DALI monitoring	•

OPTIONS /ACCESSORIES

Ball guard

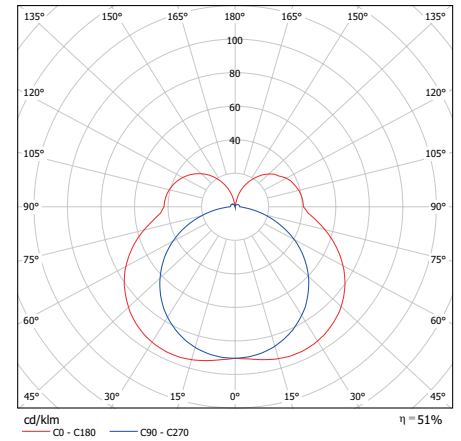

LIGHTING of ESCAPE ROUTES – EN 1838

Installation height [m]	System		System		System		System	
	1 h + 3 h	1 h + 3 h	1 h + 3 h	1 h + 3 h	1 h + 3 h	1 h + 3 h	1 h + 3 h	1 h + 3 h
2.00	3.20	1.75	8.40	5.25	2.65	1.45	6.85	4.35
2.50	3.30	1.50	8.95	5.20	2.80	1.20	7.35	4.35
3.00	3.35	0.85	9.30	4.95	2.80	0.55	7.70	4.10
3.50	3.25	-	9.50	4.10	2.75	-	7.90	3.40
4.00	3.15	-	9.60	2.50	2.60	-	8.00	1.95

All figures in metres from the middle of the luminaire

L2000/1U UNIVERSAL INSTALLATION

