

LUMINA 2000/24

30 m
IP54



LUMINA 2000/24

It really clicks! Our Lumina 2000/24 can be opened (and closed again) without tools. Nonetheless, it has a high degree of protection. It doesn't matter if you mislay your screwdriver. That's real engineering performance "Made in Rodgau".



LUMINA 2000/24 SYSTEM LUMINAIRE RECHARGEABLE BATTERY LUMINAIRE

Viewing distance	30 m	
Degree of protection	IP54	
Class	I	
Enclosure material	Aluminium	
Enclosure colour/surface	RAL 9016 (white)	
Terminal block	3 x 2.5 ² for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W	
Supply voltage	230V ± 10 %, 50/60Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	3.6 V/2.5 Ah (NiCd)	

VERSIONS

1 h with auto-check with BUS check		• •
3 h with auto-check with BUS check		• •
8 h with auto-check with BUS check		• •
without monitoring module	•	
with monitoring module	•	
with DALI monitoring	•	
Cinema version	•	
Luminous flux in normal mode 10 %		


SPECIAL FEATURE

- High degree of protection (IP65)
- Enclosure can be opened/closed without tools
- Chlorine resistant


OPTIONS /ACCESSORIES

- Ball guard
- Other RAL colours on request


L24W WALL MOUNTED

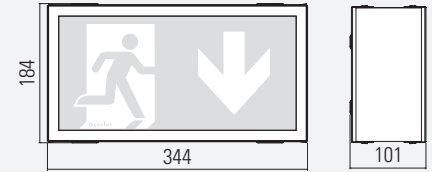


L24D CEILING MOUNTED

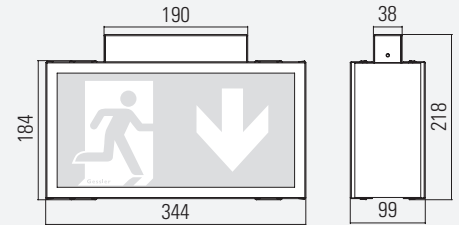

L24Ö EYE INSTALLATION

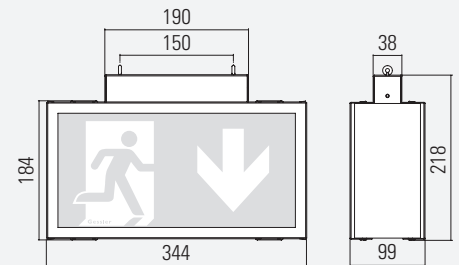

L24A WALL BRACKET MOUNTING

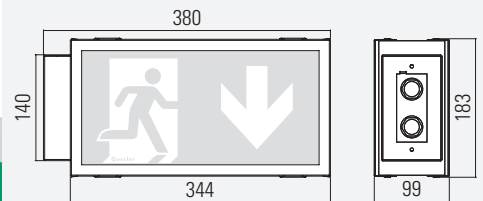

Easy opening and closing of the luminaire thanks to the Gessler click closure!