


MT2

Indication panel for connection to a Gessler LPS/CPS system



The MT2 indication panel is available not only as a surface-mounted version (MT2-A) but also as a recessed version (MT2-E). The latter is also suitable for installation in an existing device junction box with standard combination distance of 71 mm in accordance with DIN 49073-1.

Optionally available with surface-mounted enclosure (MT2-A)

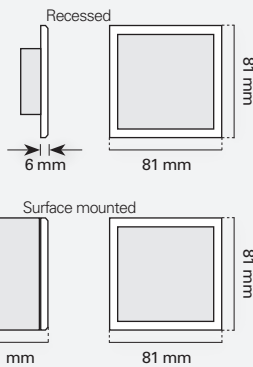

INDICATION PANEL	MT2-E MT2-A
Enclosure material	Plastic
Enclosure colour	white
Supply voltage	24 V DC
LEDstatus display	Ready, battery mode, fault
Additional control functions	Maintained on/off, LED test, horn off
Degree of protection	IP30




MT2-E




MT2-A

Integrated key-operated switch for continuous (maintained) lighting ON/OFF


CONNECTION PLAN FOR SIBELON SYSTEMS

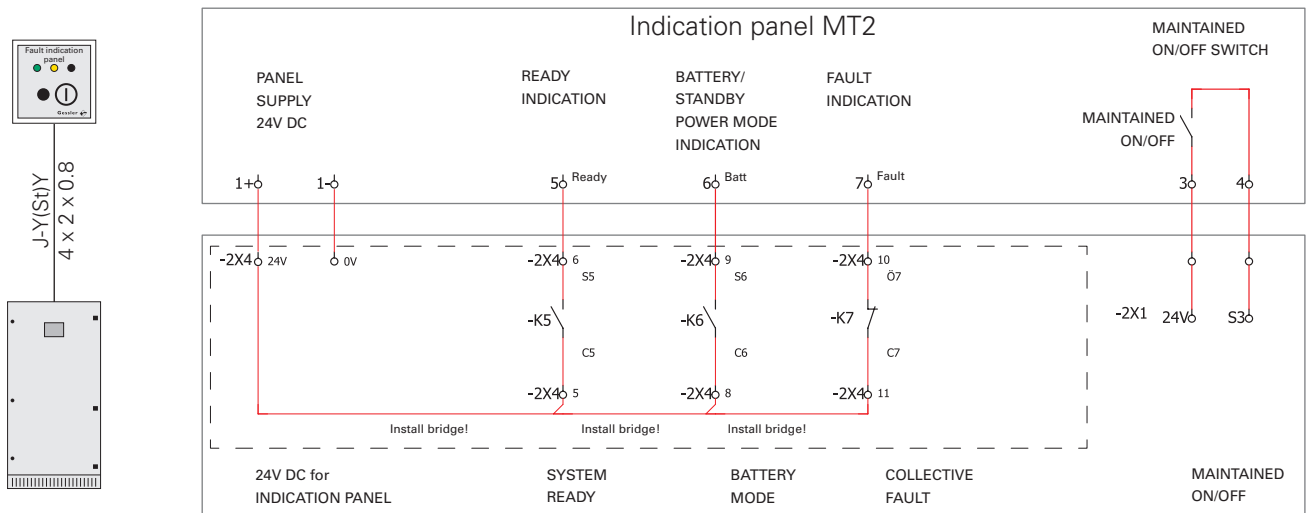

CONNECTION PLAN FOR MERLIN AND KV2000 SYSTEMS

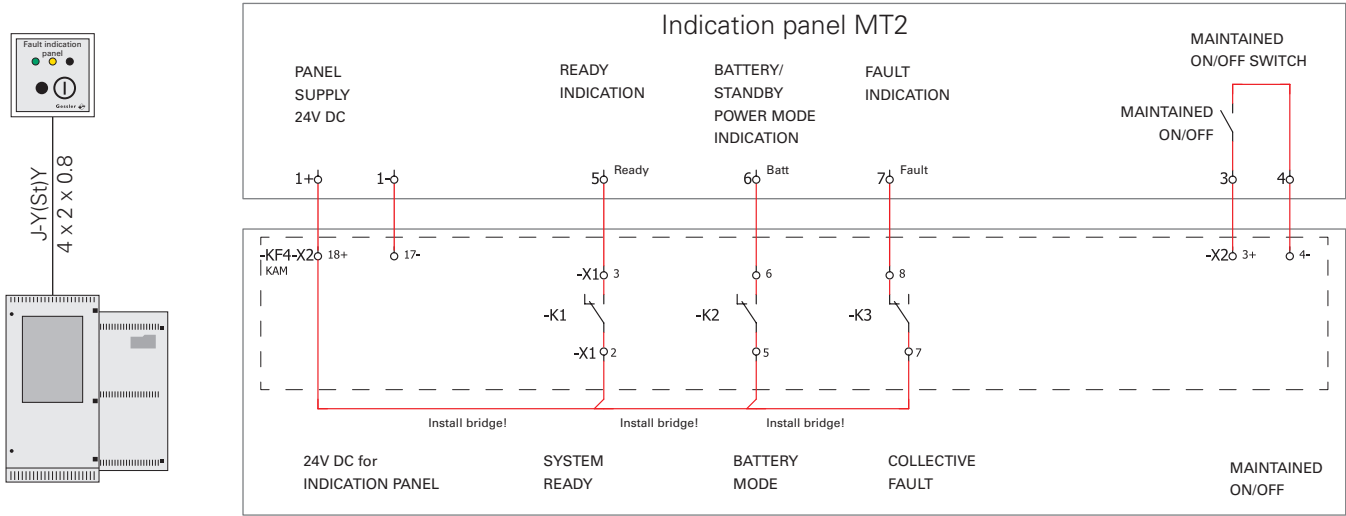

CONNECTION PLAN FOR MERLIN QUATRO SYSTEMS

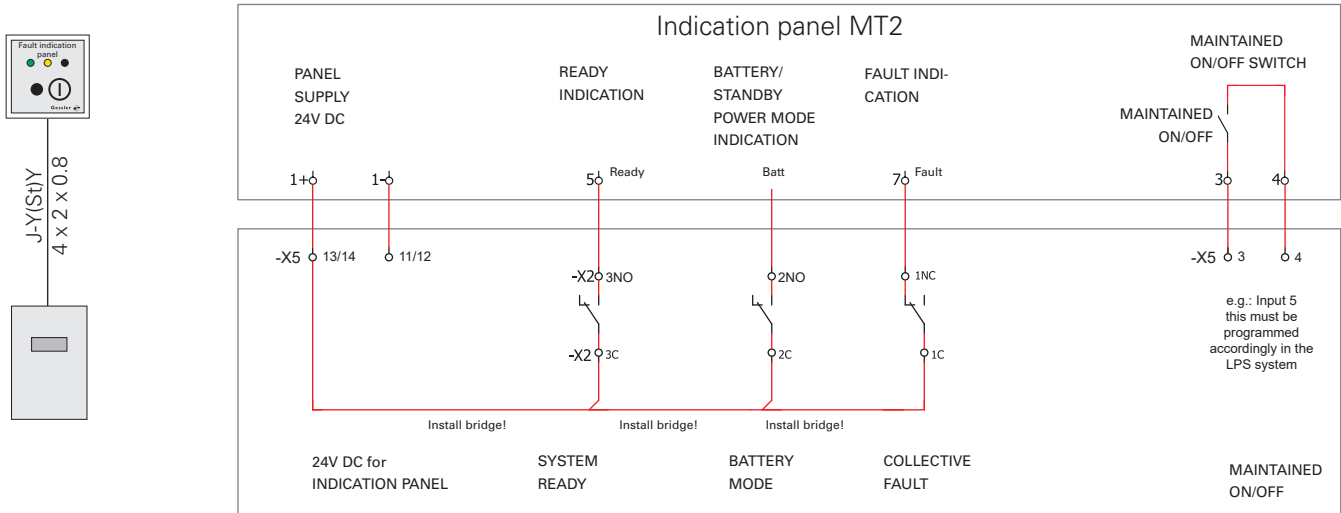

CONNECTION PLAN FOR SIBECONTROL, SIBELIGHT, SIBEMATIC AND GV1500 SYSTEMS

