

PRION 22 22m IP41



PRION 22

Beauty is in the eye of the beholder. We say that from now on, beauty hangs on the wall. Despite the small enclosure dimensions, the PRION 22 has the optimum viewing distance of 22m and is therefore particularly suitable for reception areas, corridors and event rooms.



PRION 22

SYSTEM LUMINAIRE

| | |
|--------------------------|---|
| Viewing distance | 22 m |
| Degree of protection | IP41 |
| Class | II |
| Enclosure material | Polycarbonate |
| Enclosure colour/surface | White |
| Terminal block | 3 x 2.5 [□] for through wiring |
| Light source | LED |
| Ambient temperature | 0° C to +40° C |
| Connected load (AC/DC) | 4.5 VA / 4.0 W |
| Supply voltage | 230V ± 10 %, 50/60 Hz / 176-275 V DC |

VERSIONS

| | |
|--------------------------------------|---|
| 1 h with auto-check with BUS check | |
| 3 h with auto-check with BUS check | |
| 8 h with auto-check with BUS check | |
| without monitoring module | • |
| with monitoring module | • |
| with DALI monitoring | |
| Cinema version | |
| Luminous flux in normal mode 10 % | |

SPECIAL FEATURE


- Power supply via Cable suspension

OPTIONS /ACCESSORIES


- Cable lengths up to 6 m
- Fire resistant box for installation in F30/90 fire resistant ceilings
- Concrete installation box for installation in concrete ceilings




P22W WALL MOUNTING

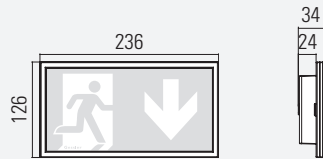


P22W RECESSED WALL MOUNTING

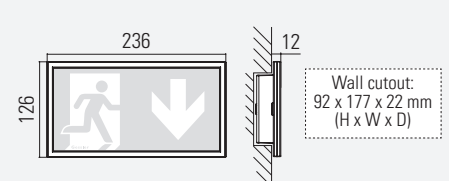


P22D CEILING MOUNTING

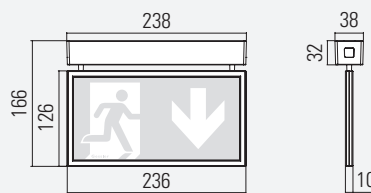


P22S CABLE SUSPENSION MOUNTING

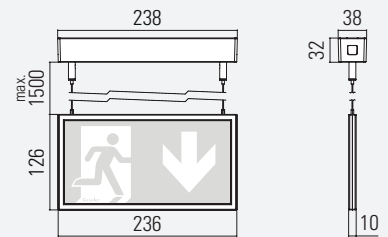

P22E RECESSED CEILING MOUNTING

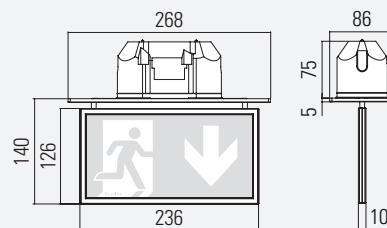

P22F RECESSED CABLE SUSPENSION MOUNTING

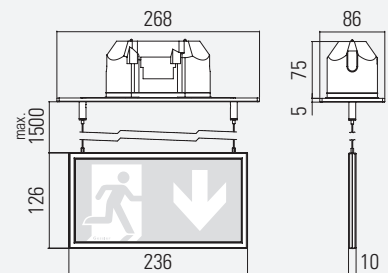

Ceiling cutout:
Cut hole: 2 x Ø 68 mm,
centre-to-centre spacing 71 mm

Ceiling cutout:
Cut hole: 2 x Ø 68 mm,
centre-to-centre spacing 71 mm