


SL3 IP67



SL3

Set signs – in the floor. The SL3 is an unobtrusive, footfall-resistant recessed floor luminaire with anti-slip glass cover (conforming to DIN 51130). It shows the way, even if the room is filled with thick smoke. The SL3 is particularly suitable for indoor and outdoor areas with heavy pedestrian traffic.

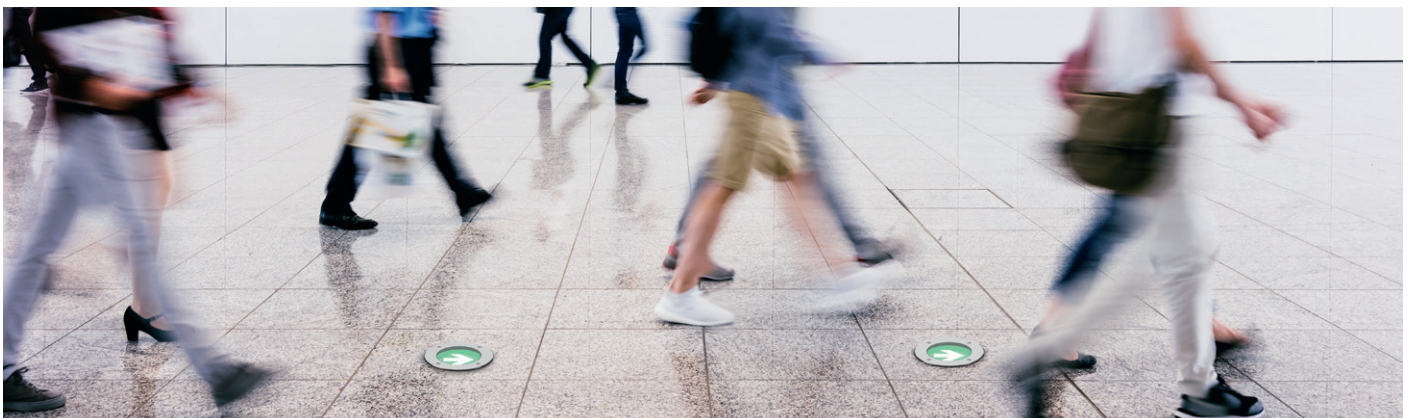

SYSTEM VERSION

Protection rating	IP67
Protection class	I
Housing material	Stainless steel
Housing colour/finish	brushed metal finish
Terminal	3 x 2,5 [□]
Illuminant	LED
Ambient temperature	-20°C to + 40°C
Power (AC/DC)	10 VA / 5 W
Voltage	230 V AC/DC




MODEL

1 h with auto BUS check	-
3 h with auto BUS check	-
8 h with auto BUS check	-
without monitoring	•
with monitoring	• (for SIBELON systems only)
DALI monitoring	-
Cinema version	-

ACCESSORIES | OPTIONS

Concrete embedding pot (SL3_BET)

RECESSED FLOOR MOUNTING

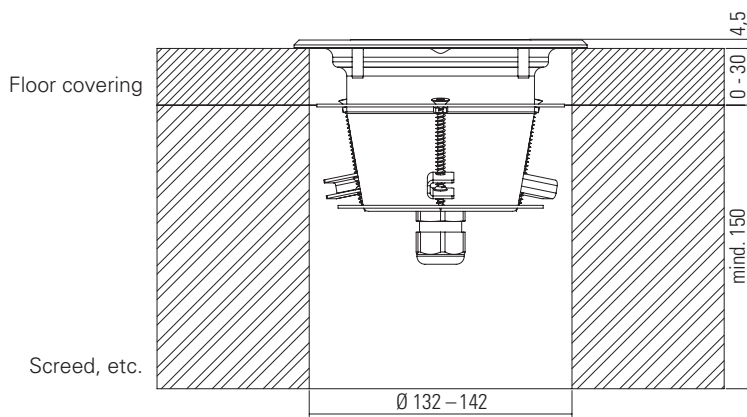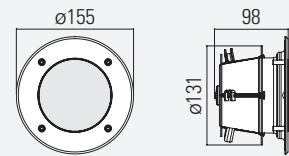

Luminaire ON:
arrow indicates exit route



Luminaire OFF:
arrow not visible